



ITALIANA VALVOLE INDUSTRIALI TORINO

Produzione e vendita apparecchiature idrauliche e industriali


Valvola a getto conico

Conical valves

PN: 10-16-25-40

DN: 300-2000

MATERIALS		
POS	DENOMINATION	MATERIAL
1	BODY	S275JR + AISI304
2	COVER	S275JR + AISI304
3	FLANGE	S275JR
4	DIAGONAL SCREW	8.8
5	CYLINDER GUIDE COVER	F-111
6	SWITCH LIMIT SDP	S275JR
7	BASE	S275JR
8	SUPPORT LIMIT SWITCH	A42B
9	BOX BAL	-
10	HYDRAULIC CYLINDER	-
11	PIN	F-114
12	RULER	ALUMINIUM
13	LIMIT SWITCH	XDM-A115
14	DIAGONAL SCREW	8.8
15	GROWER WASHER	STEEL
16	COLLAR	SIMRIT NBR / 1051
17	COUNTER COLLAR	CESTICUR
18	DIAGONAL SCREW	8.8
19	GROWER WASHER	STEEL
20	DIAGONAL SCREW	8.8
21	GROWER WASHER	STEEL
22	PIN BOLT	STEEL
23	RIVET	ALUMINIUM
24	SEAT	EPDM
25	COVER COLLAR	S275JR
26	SCREW (DN912)	8.8
27	NUT(DIN934)	8.8
28	WASHER	STEEL
29	SPACER	F-111
30	STATIC DEFLECTOR	STEEL
31	MOBILE DEFLECTOR	STEEL

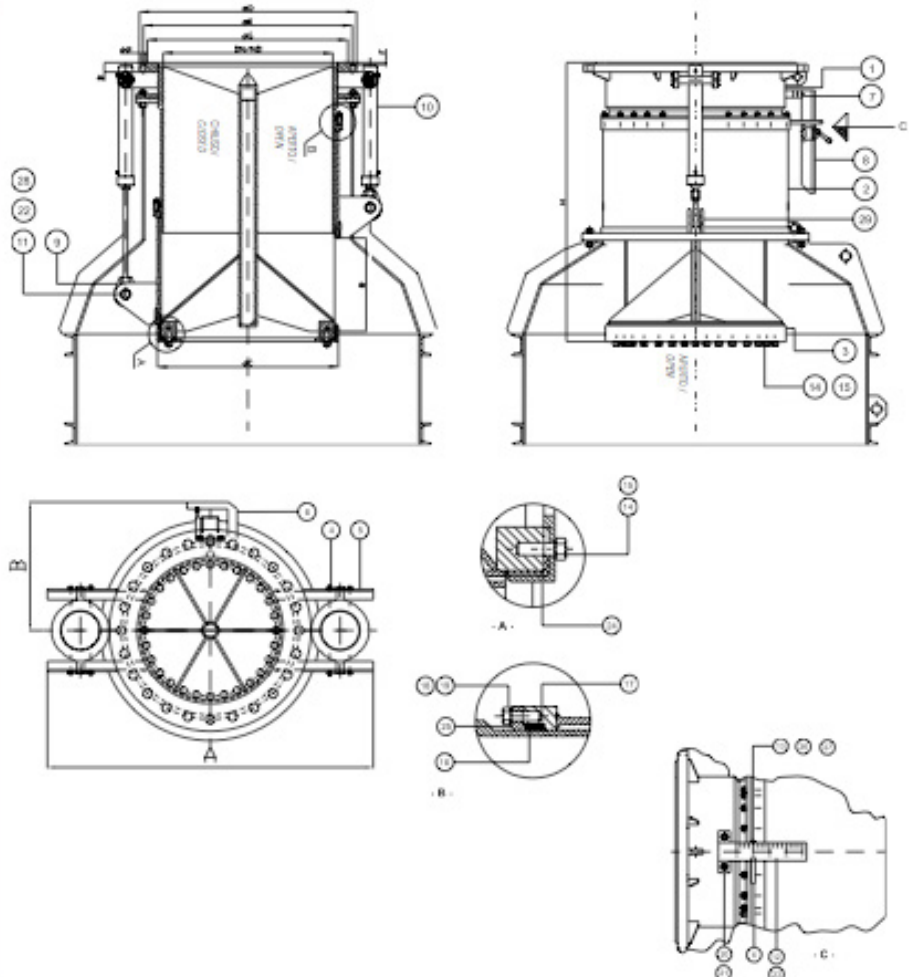

DIMENSIONS														
DN	A	B	H	R	aC	HYDRAULIC CYL.	F	B	aG	aD	aK	CANT.	ad	WEIGHT Kg
300	655	288	809	232	334	a50/a28x240	3	20	370	445	400	12	23	200
350	655	288	809	232	334	a50/a28x240	3	20	430	505	460	16	23	-
400	730	380	985	220	445	a50/a28x250	4	26	482	565	515	16	27	410
500	860	450	1065	268	556	a50/a28x300	4	28	585	670	620	20	27	640
600	995	475	1210	328	662	a63/a45x350	5	28	685	780	725	20	30	780
700	1140	525	1355	350	760	a63/a45x400	5	30	800	895	840	24	30	1020
800	1322	580	1545	500	870	a100/a45x550	5	32	905	1015	950	24	33	1320
900	1250	650	1575	585	960	a100/a45x600	5	34	1005	1115	1050	28	33	1770
1000	1390	655	1870	670	1060	a100/a45x700	5	34	1110	1230	1160	28	36	2200
1100	1490	705	1988	675	1160	a100/a45x700	5	40	1220	1345	1270	28	36	-
1200	1590	755	1925	680	1260	a100/a45x720	5	40	1330	1455	1380	32	39	-
1400	1872	955	2080	715	1482	a100/a45x750	5	42	1535	1675	1590	36	42	-
1500	2165	1150	2235	750	1584	a160/a70x760	5	46	1760	1915	1820	40	48	-
1600	2265	1150	2560	900	1778	a160/a70x950	5	46	1760	1915	1820	40	48	-
1800	2465	1250	3060	1050	2000	a160/a70x1100	5	50	1960	2115	2020	44	48	-
2000	2715	1390	3500	1150	2222	a160/a70x1200	5	54	2170	2325	2230	48	48	-



ITALIANA VALVOLE INDUSTRIALI TORINO

Produzione e vendita apparecchiature idrauliche e industriali


Valvola a getto conico

Conical valves

PN: 10-16-25-40

DN: 300-2000

MATERIALS		
POS	DENOMINATION	MATERIAL
1	BODY	S275JR - A/ISI304
2	COVER	S275JR - A/ISI304
3	FLANGE	S275JR
4	DIAGONAL SCREW	8.8
5	CYLINDER GUIDE COVER	F-111
6	SWITCH LIMIT STOP	S275JR
7	BASE	S275JR
8	SUPPORT LIMIT SWITCH	A42B
9	BOX BALL	-
10	HYDRAULIC CYLINDER	-
11	PIN	F-114
12	RULER	ALUMINIUM
13	LIMIT SWITCH	KOM-A115
14	DIAGONAL SCREW	8.8
15	GROWER WASHER	STEEL
16	COLLAR	SIMRIT NBR / 1051
17	COUNTER COLLAR	CESTICUR
18	DIAGONAL SCREW	8.8
19	GROWER WASHER	STEEL
20	DIAGONAL SCREW	8.8
21	GROWER WASHER	STEEL
22	PIN BOLT	STEEL
23	RIVET	ALUMINIUM
24	SEAT	EPDM
25	COVER COLLAR	S275JR
26	SCREW (DN912)	8.8
27	NUT (DN934)	8.8
28	WASHER	STEEL
29	SPACER	F-111
30	STATIC DEFLECTOR	STEEL
31	MOBILE DEFLECTOR	STEEL

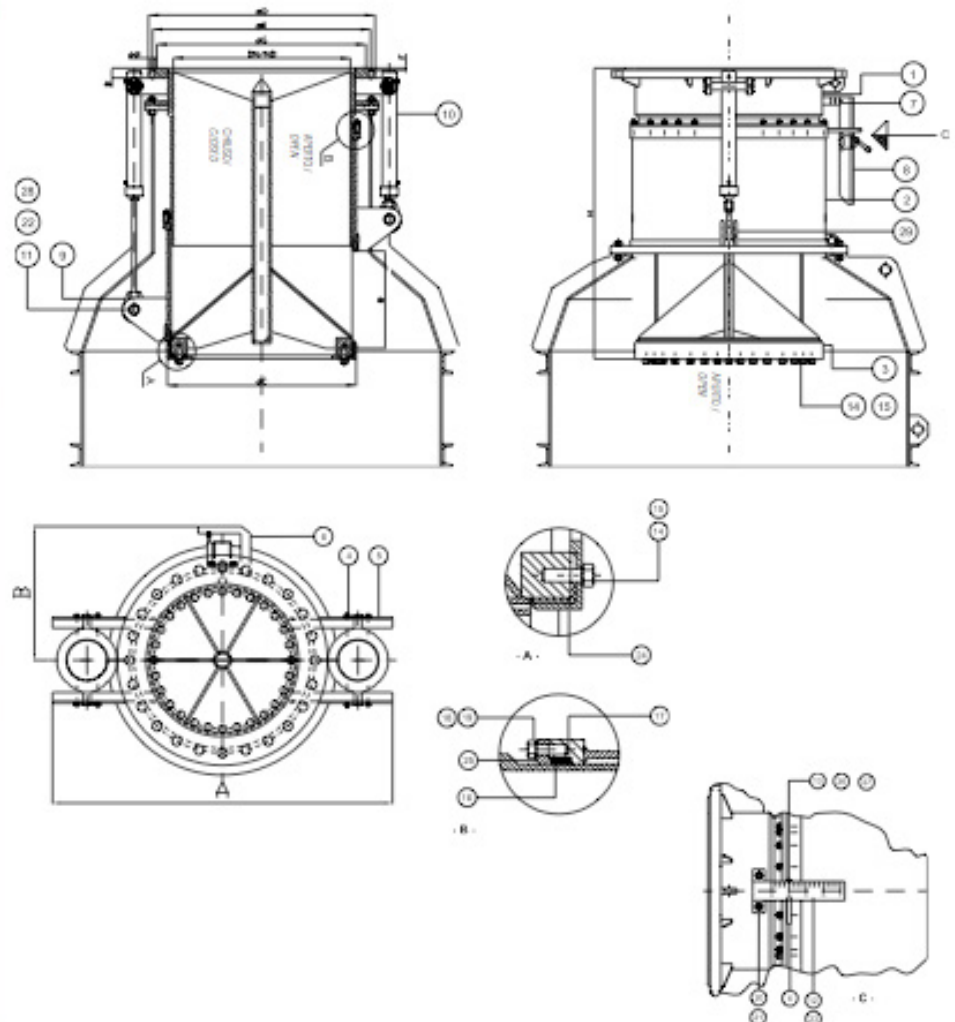

DIMENSIONS														
DN	A	B	H	R	øC	HYDRAULIC CYL.	F	B	øG	øD	øK	CANT.	ød	WEIGHT Kg
300	655	288	809	232	334	ø50/ø28x240	3	20	370	445	400	12	23	200
350	655	288	809	232	334	ø50/ø28x240	3	20	430	505	460	16	23	-
400	730	380	985	220	445	ø50/ø28x250	4	26	482	565	515	16	27	410
500	860	450	1065	268	556	ø50/ø28x300	4	28	585	670	620	20	27	640
600	995	475	1210	328	662	ø63/ø45x350	5	28	685	780	725	20	30	780
700	1140	525	1355	350	760	ø63/ø45x400	5	30	800	895	840	24	30	1020
800	1322	580	1545	500	870	ø100/ø45x550	5	32	905	1015	950	24	33	1320
900	1250	650	1575	585	960	ø100/ø45x600	5	34	1005	1115	1050	28	33	1770
1000	1390	655	1870	670	1060	ø100/ø45x700	5	34	1110	1230	1160	28	36	2200
1100	1490	705	1988	675	1160	ø100/ø45x700	5	40	1220	1345	1270	28	36	-
1200	1590	755	1925	680	1260	ø100/ø45x720	5	40	1330	1455	1380	32	39	-
1400	1872	955	2080	715	1482	ø100/ø45x750	5	42	1535	1675	1590	36	42	-
1500	2165	1150	2235	750	1584	ø180/ø70x760	5	46	1760	1915	1820	40	48	-
1600	2265	1150	2560	900	1778	ø180/ø70x950	5	46	1760	1915	1820	40	48	-
1800	2465	1250	3060	1050	2000	ø180/ø70x1100	5	50	1960	2115	2020	44	48	-
2000	2715	1390	3500	1150	2222	ø180/ø70x1200	5	54	2170	2325	2230	48	48	-